


Classpad Help Series sponsored by Casio Education Australia		www.casioed.net.au	
044	Edit And Delete User Defined Functions	Author	Charlie Watson
		Date	08 February 2009
		CPM OS	03.03.3000


Changing a User Defined Function.

If a function has already been defined, simply redefine it using the same name as shown at right.

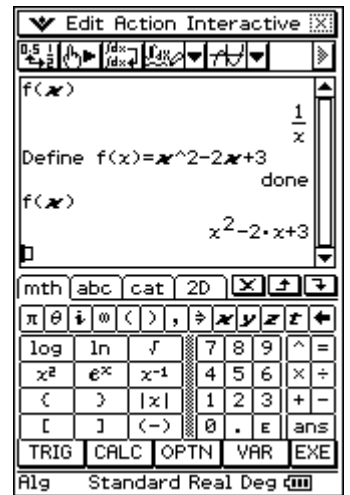

Editing a User Defined Function.

From the Main menu choose Programs.

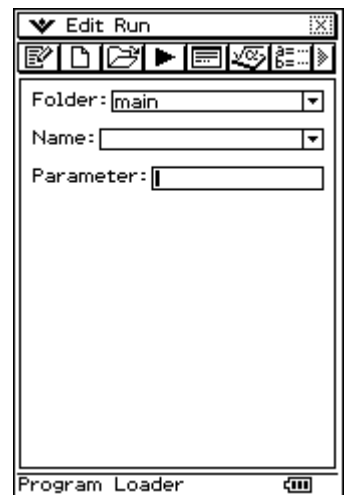


Tap the Open Folder icon .


Set the Type to Function.


Check that the Folder is set to 'main'.

Then choose the required function from the Name box and tap OK.

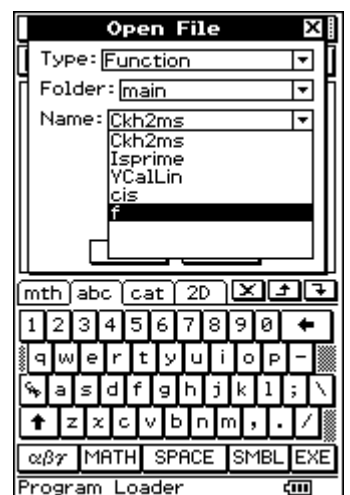


The function definition is displayed.



Edit the function as required and tap the save icon .




Return to Main, enter the function and see that it has now been updated.



### Deleting a User Defined Function.

From Main, tap **Settings, Variable Manager**.




Tap the main folder to highlight it and tap main again to open it.



Select the variables to be deleted by tapping the relevant checkboxes.

*Note that functions will have 'FUNC' as their variable type.*



Tap **Edit, Delete** and confirm with **OK**.



The functions have been deleted.

Tap **Close** and **Close** to return to Main.

